

HOOLA SUSPENSION

TYPE:

PROJECT NAME:

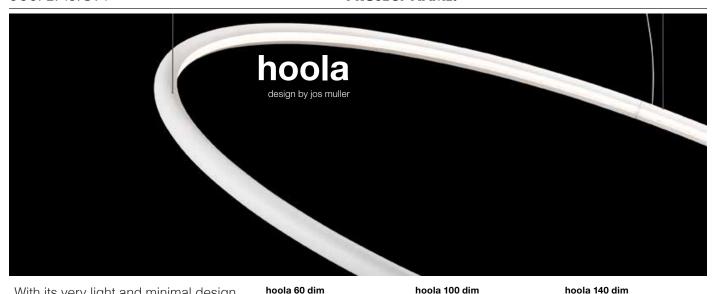

With its very light and minimal design hoola creates an archetypical light circle. The soft light is directed upwards and downwards while its highly efficient led-light curves along with the lamp shape. Hoola is available in 60, 100 and 140cm diameter. Hoola will be a real eyecatcher when different diameters are combined. It can be arranged in horizontal, angled or even vertical positions. The lamps can be place close to a ceiling, in free open spaces or vertically along the wall.





white	T92H3DWLD				
black	T92H3DZLD				
order code 2	2700K				
white	T92H9DWLD				
black	T92H9DZLD				
order code 3000K					
white	T92H1DWLD				
black	T92H1DZLD				

order code 2400K

hoola 100 dim



lamp type	LED
colour temp.	2400K / 2700K / 3000K
max. watt	60W
voltage	120V
lumen	3540
class	1
gear	incorporated (dimmable)
diameter	1000 mm (39.37")
height	25 (max 2500) mm (0.98")

black	T92H4DZLD
rder code 2	2700K
white	T92H10DWLD
hlack	T92H10DZLD


white T92H2DWLD

black T92H2DZLD

white T92H4DWLD

order code 2400K

hoola 140 dim



lamp type	LED
colour temp.	2400K / 2700K / 3000K
max. watt	90W
voltage	120V
lumen	4950
class	1
gear	incorporated (dimmable)
diameter	1400 mm (55.11")
height	25 (max 2500) mm (0.98"

hite	T92H17DWLD
lack	T92H17DZLD
code 2	700K
code 2	700K T92H14DWLD

white T92H13DWLD

black T92H13DZLD

ORDERING INFO				
	Model (Order Code)	Finish	LED	Voltage/Dimming
		○ White	○ 2400K	 120V Phase Dimming (Integral Driver)
		○ Black	○ 2700K	☐ 120V 0-10V Dimming (Remote Driver)
			○ 3000K	277V 0-10V Dimming (Remote Driver)
Intertek			○ 3500K	
Intertek				

tossB[®]

SHEET

ECIFICATION